


LED Spot Light - FG Series

IP66 Waterproof & Rugged Aluminum Build

It adopts a full - structure waterproof design (no glue process) with an IP66 rating. The lamp body uses 6063 aluminum alloy extrusion, paired with a die - cast aluminum top cover.

RGBW & DMX512 Control


Equipped with high - performance OSRAM/CREE leds, it offers monochrome, RGB Three - in - one, or RGBW 4 - in - one options, supporting DMX512 control with automatic addressing.

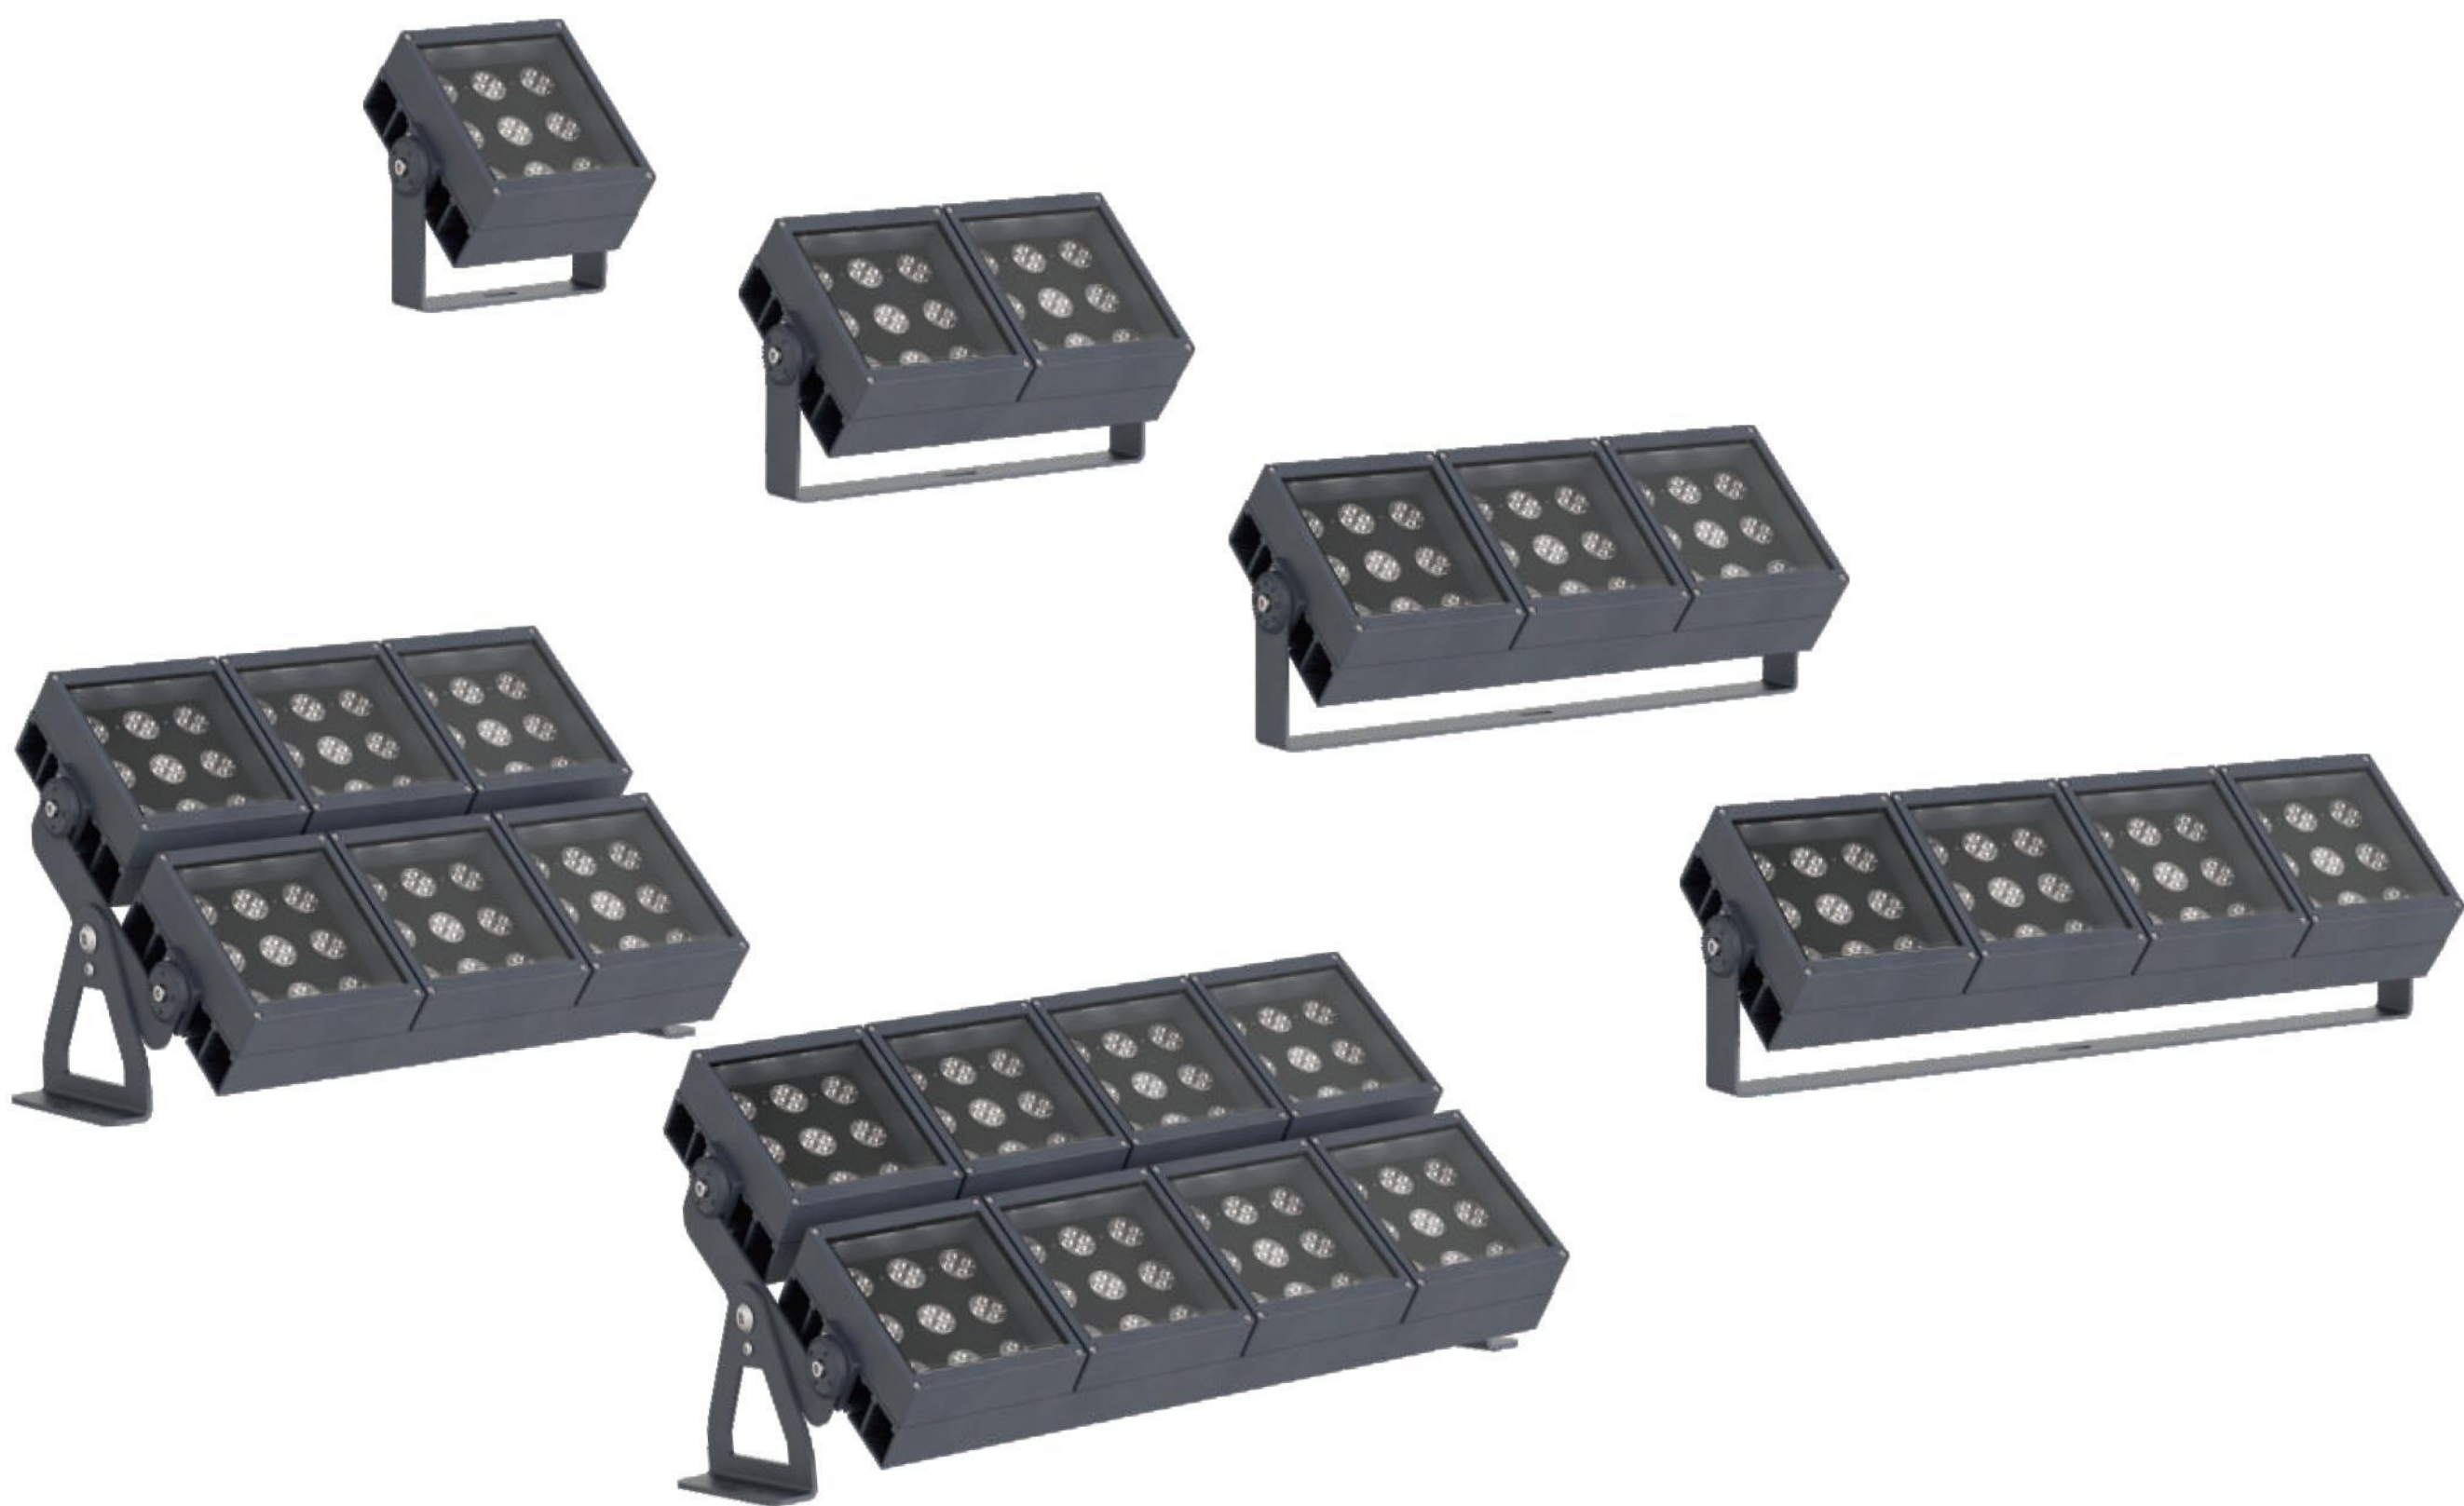

Specifications

Item	Power	LED qty	LED	Luminous Color	IP	Voltage	L*W*H(mm)
GS-FG-3601	25W	36PCS	OSRAM	SINGLE/DMX	IP66	AC220V/DC24V	187×160×158
GS-FG-12S3	36W	12PCS	3IN1	RGB	IP66	AC220V/DC24V	187×160×158
GS-FG-12F3	36W	12PCS	4IN1	RGBW	IP66	AC220V/DC24V	187×160×158
GS-FG-7201	50W	72PCS	OSRAM	SINGLE/DMX	IP66	AC220V/DC24V	339×160×158
GS-FG-24S3	72W	24PCS	3IN1	RGB	IP66	AC220V/DC24V	339×160×158
GS-FG-24F3	72W	24PCS	4IN1	RGBW	IP66	AC220V/DC24V	339×160×158
GS-FG-10801	75W	108PCS	OSRAM	SINGLE/DMX	IP66	AC220V/DC24V	491×160×158
GS-FG-36S3	108W	36PCS	3IN1	RGB	IP66	AC220V/DC24V	491×160×158
GS-FG-36F3	108W	36PCS	4IN1	RGBW	IP66	AC220V/DC24V	491×160×158
GS-FG-14401	100W	144PCS	OSRAM	SINGLE/DMX	IP66	AC220V/DC24V	643×160×158
GS-FG-48S3	144W	48PCS	3IN1	RGB	IP66	AC220V/DC24V	643×160×158
GS-FG-48F3	144W	48PCS	4IN1	RGBW	IP66	AC220V/DC24V	643×160×158
GS-FG-21601	150W	216PCS	OSRAM	SINGLE/DMX	IP66	AC220V/DC24V	485×340×214
GS-FG-72S3	216W	72PCS	3IN1	RGB	IP66	AC220V/DC24V	485×340×214
GS-FG-72F3	216W	72PCS	4IN1	RGBW	IP66	AC220V/DC24V	485×340×214
GS-FG-28801	200W	288PCS	OSRAM	SINGLE/DMX	IP66	AC220V/DC24V	637×340×214
GS-FG-96S3	288W	96PCS	3IN1	RGB	IP66	AC220V/DC24V	637×340×214
GS-FG-96F3	288W	96PCS	4IN1	RGBW	IP66	AC220V/DC24V	637×340×214

Curve

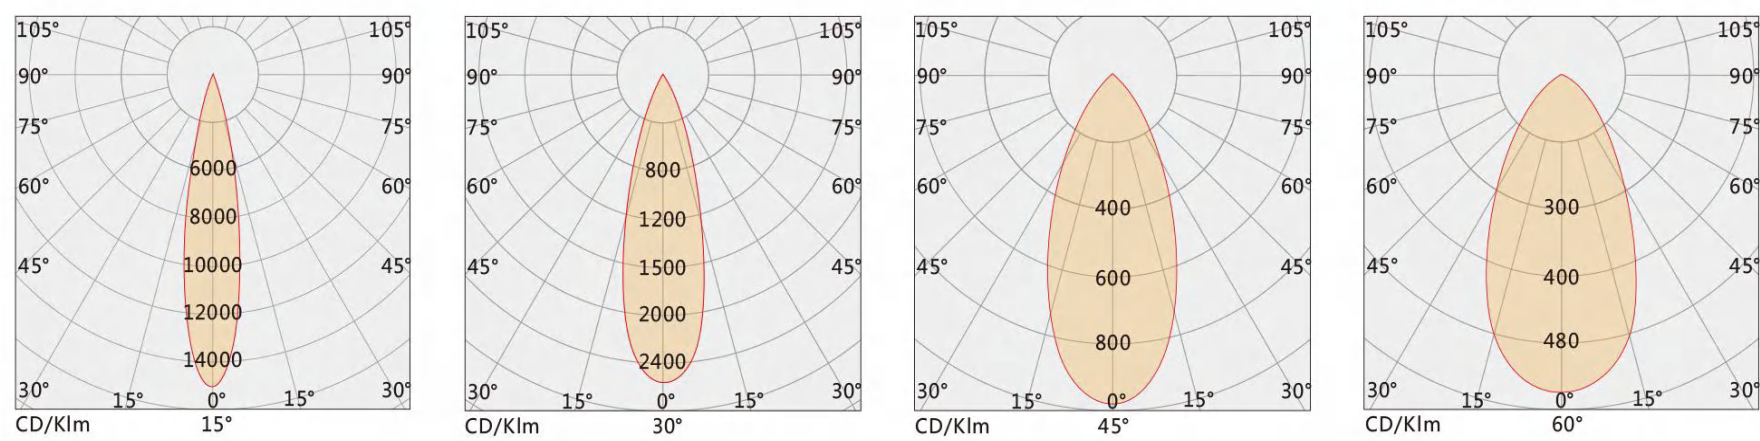

Size

